


Flexible, nonmetallic Electrical Tubing

Convolutated Tubing

Product Number CT

- 1/4" thru 2" trade size
- Use with straight or right angle connectors
- Resists corrosion, oil & water
- Maximum flexibility, can be used in extremely tight quarters
- Resists abuse, pulling & crushing
- Smooth inside for easier wire pulling
- Light weight, lower installed cost
- Outdoor, sunlight resistant
- Quick installation, cuts with utility knife or PVC cutter
- Integral rigid & flexible PVC construction
- Suitable for use in high vibration or flexing applications

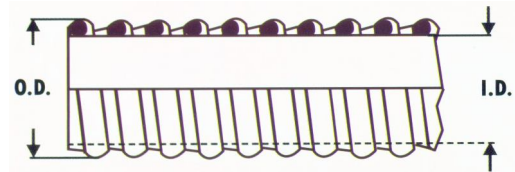

Specifications:

Order Size	O. D. Min.-Max.	I. D. Min.-Max.	Std. Pkg.
1/4"	.560" - .575"	.385" - .405"	100'
3/8"	.690" - .710"	.484" - .504"	100'
1/2"	.820" - .840"	.622" - .642"	100'
3/4"	1.030"-1.050"	.820" - .840"	100'
1"	1.290"-1.315"	1.041"-1.066"	100'
1-1/4"	1.630"-1.660"	1.380"-1.410"	100'
1-1/2"	1.865"-1.900"	1.575"-1.600"	50'
2"	2.340"-2.375"	2.020"-2.045"	50'

Recognized under the Components program of Underwriters' Laboratories File No. E129972



CSA Certified by Canadian Standards Association File No. LL-84707, except where noted by * in specifications table.

