

Adhesive Lined Heat Shrink Tubing

- Flexible, thin wall
- 2:1 & 3:1 shrink ratio
- Flame retardant outer jacket

Product Number IP44A2 & IP45A3


Adhesive Lined Heat Shrink Tubing is a flexible polyolefin lined with a thin layer of special thermoplastic adhesive for excellent moisture protection and strain relief.

This tubing offers convenient protection of electrical components, wire splices or bundling of wires. Automotive, truck and marine wiring splices and connections are quickly and easily protected from harsh environments.

With the application of heat Adhesive Lined Heat Shrink Tubing shrinks to a tight fit, forcing the adhesive lining to flow and cover the substrate. When cooled the adhesive forms a permanent, flexible and waterproof barrier.

The tubing is available in a standard 2 to 1 shrink (product #IP44A2), and also as a 3 to 1 shrink (product #IP45A3) for hard to fit applications.

For larger diameters see product #IP47HV Heavy Wall Polyolefin Tubing.

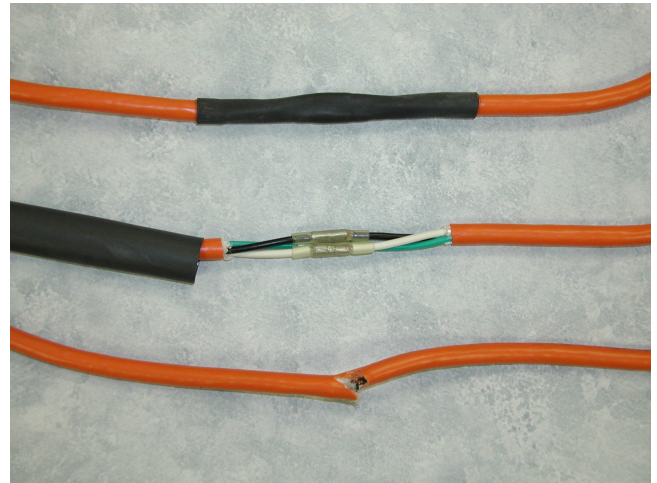

adhesive liner seals out moisture

Specifications:

<u>Order Size</u>	<u>Expanded Diameter</u>	<u>Recovered Diameter</u>	<u>Recovered Wall</u>
2:1 Shrink			
1/8"	.125	.062	.026
3/16"	.187	.093	.026
1/4"	.250	.125	.029
3/8"	.375	.187	.029
1/2"	.500	.250	.030
3/4"	.750	.375	.029
1"	1.000	.500	.042
3:1 Shrink			
1/8"	.125	.040	.038
3/16"	.187	.060	.043
1/4"	.250	.080	.047
3/8"	.375	.120	.050
1/2"	.500	.157	.055
3/4"	.750	.313	.065

Product #IP44A2 only:

Mil-I-23053/4 Class 2

U/L Approved

Product #IP45A3 only:

Mil-I-23053/4 Class 3

U/L Approved

Shrink Temperature: 121C

Electrical: 500 Volts/Mil

Standard Lengths 4' (spool lengths available on request)

Markers and Cut Pieces: Cutting and printing on this tubing is available - call for a quotation.